

EcO₃Ice

ANTIMICROBIAL ICE PROTECTION

MODEL NUMBER

X4



PRODUCT OVERVIEW

The compact EcO₃Ice device uses a unique, diamond-based technology that continuously treats incoming ingredient water used by ice machines, killing bacteria, yeast and mold in the ice-making path from beginning to end. It reduces biofilm build-up, greatly extending required time between cleanings. With each cycle, EcO₃Ice creates a small, but effective amount of ozonated water – nature’s favorite sanitizer. The ozonated water continuously treats the machine interior, storage bin, remote bin and drains.

STANDARD PRODUCT FEATURES

- Attaches quickly and easily to incoming water line of ice machine
- Runs silently and automatically
- Operator-replaceable, “twist-on” electrolytic cartridge

X4 COMPATIBILITY

- Fits most commercial ice machines with ice making capacity of 100lbs or larger with flow rate of up to 1.3gpm
- For units requiring more than 1.3gpm, refer to Model X16

CARTRIDGE LIFE

- 50,000 gallons*
- LED indicator lamps show status, tells when it’s time to replace cartridge

WARRANTY

- Warranted against defects in materials and workmanship for 1 year
 - Parts only, on head unit
 - 90 days parts-only on cartridge
 - Normal use exclusions apply, per operation manual





RoHS



EcO₃Ice - ANTIMICROBIAL ICE PROTECTION

Model X4

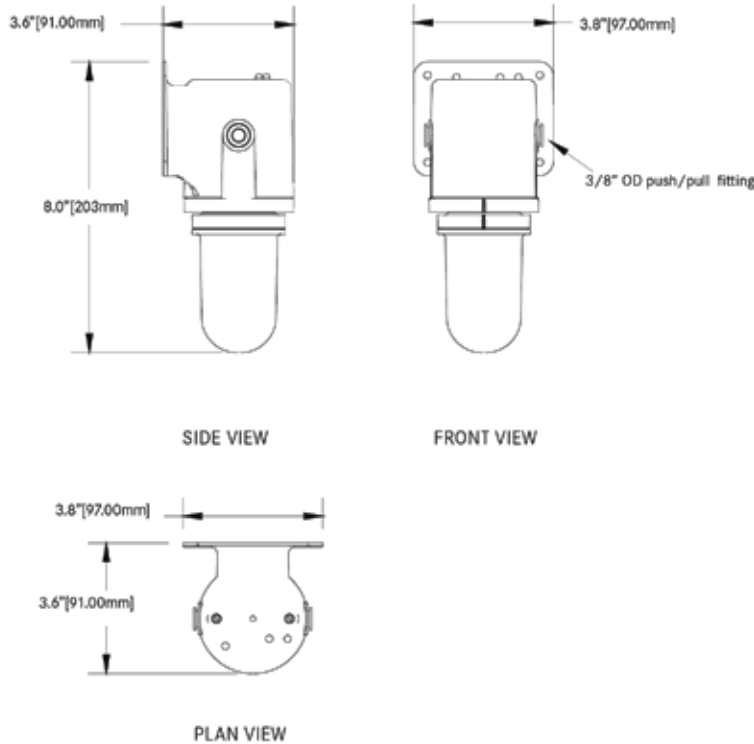

DIMENSIONS	Width	3.8" 97mm	SHORT-FORM SPECIFICATIONS: Model No. <i>EcO₃Ice</i> X4 measures approximately 3.8" W x 3.6" D x 8.0" H and requires 100-240v, 50/60 Hz supply for provided 24v, 1.25a transformer (integrated into power cord). Unit shall include synthetic diamond-based electrolytic technology to produce a small, safe and precise amount of dissolved ozone from the oxygen in the ice machine's water supply; removable electrolytic cell cartridge; LED indicator lights for cartridge replacement and system function. Shall include 1 year parts-only warranty on head unit and 30 days parts-only warranty on replacement cartridge.
	Depth	3.6" 91mm	
	Height	8.0" 203mm	
ELECTRICAL	Voltage	100-240	
	Phase	1	
	Amps (by phase)	1.25 Max	
	Watts (by phase)	30 Max	
Unswitched Circuit 		Within 5' of <i>EcO₃Ice</i>	
WEIGHT	Net Weight	1.8 lbs	
	Gross Weight	2 lbs	
SHIPPING	Ships From:	Local Distributor	
	WATER		
Water Line Connection		3/8" OD push/pull fitting	
Water Temperature		40°F to 86°F (4°C to 30°C) WRAS approved for cold water use only in UK. (4°C - 23°C)	
Water Quality		Clean, Potable Water Only (recommended hardness ≤300 ppm CaCO ₃)	
Water Supply Pressure		min 20 psi max 125 psi min (1.37 bar) max (8.62 bar)	
Water Flow		0.34gpm - 1.3gpm (1.3lpm - 4.9lpm)	
MISC.		<ol style="list-style-type: none"> 1. Connect <i>EcO₃Ice</i> only to a cube, not a flake/nugget, ice machine 2. Connect only one ice machine per <i>EcO₃Ice</i> device 3. Connect <i>EcO₃Ice</i> only to a commercial ice machine, not a household ice maker. 4. Do not connect <i>EcO₃Ice</i> to other devices, such as a beverage or water dispenser. 5. <i>EcO₃Ice</i> does not replace mechanical water filtration. For best results, always connect <i>EcO₃Ice</i> in the water supply line between the filtration system and the ice machine. 	